




COSWICK HARDWOOD FLOORING | TECHNICAL INFORMATION

Product # 1326-3101

COSWICK
Solid Hardwood Floors



COLLECTION | CHEVRON COLOR | NATURAL

Wood species | American Walnut


Grade | Traditional

Constructions | 3-layer Single Strip Flooring CosLoc

Size | 15 x 127 x 548 mm (5/8" x 5" x 21 3/8")

Finish | Lacquer CosNanoTech+

CONSTRUCTION : 3-LAYER SINGLE STRIP FLOORING CosLoc 5G

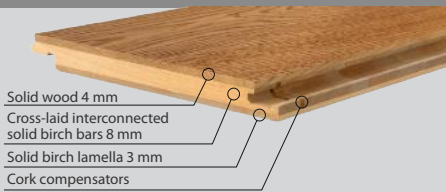DIMENSIONS :			PACKAGING :	
			BOX	PALLET
Thickness	15 mm (5/8")		Content: 1,392 m ²	54 (75,168 m ²)
Width	127 mm (5")		Weight 15 kg	804 kg
Length	548 mm (21 3/8")		H x W x L 151 x 297 x 665 mm	1080 x 832 x 2050 mm
Cut angle	60°		Content: 14,98 sq.ft.	808,92 sq.ft.
Microbevel	0,5 mm		Weight 33 lb	1779 lb
Joint type	Click system (CosLoc)		H x W x L 6" x 12" x 26"	43" x 32" x 81"

DEVIATIONS :

Deviation on Thickness	± 0,2 mm	EN 13489 ГОСТ 862.3 CT5 2121
Deviation on Width	± 0,2 mm	
Height Difference	≤ 0,2 % of width	
Cup	≤ 0,2 % of plank width	EN 13489
Bow	≤ 0,1 % of length	
Spring	≤ 0,5 % of length	

CHARACTERISTICS :

Fire resistance	Dfl-s1	EN 14342
Formaldehyde emission class	E1	
Pentachlorophenol content	None	
Thermal resistance	0,095 m ² ·K/W	
Thermal conductivity	0,158 W/(m·K)	
Structural warranty	Lifetime	

INSTALLATION :



Can be installed by floating way on underlayment or by glueing down over concrete, plywood or wooden subfloor. Applicable above and on the ground level.

STORAGE AND USAGE :



— Air humidity 40% – 65%
— Temperature +18 °C – +22 °C

FINISH : LACQUER CosNanoTech+

DESCRIPTION :	
Type of coating	UV-curable polyurethane-acrylate with micro-corundum
Surface (finish) type	Closed pores
Sheen	Semigloss 30-40 GU/60°
Finish warranty	25 years

CLASSIFICATION SURFACE CHARACTERISTICS :

Wear resistance	Taber Test - 500 turns (S 42; 1000 gr)	EN 438-2
Scratch resistance	Rating 3	EN 438
Slip resistance	46 (SRV dry)	EN 15676
Resistance to chemical agents	Class 5 (Except blue ink)	EN 13442
Repairability	Low	

MAINTENANCE AND CARE CONDITIONS :

Maintenance of hardwood floors with lacquer CosNanoTech+ finish assumes regular (daily if necessary) cleaning from dust and dirt using a vacuum, followed by a thorough cleaning using Coswick hardwood floor cleaner or other similar product. Due to high wear resistance properties, CosNanoTech+ lacquer finish does not require any additional care or finish renewal throughout the entire life of the floor.

GRADE : TRADITIONAL

DESCRIPTION :		DESCRIPTION :	
Sound sapwood	No limit	Bark pocket	Permitted up to 50 mm in length, up to 5 mm in width, filled
Colour variation	No limit	Pith	Permitted
Knot	Permitted up to 25 mm, filled	Slope of grain	Permitted
Checks	Permitted filled up to 0,5 mm in width	Medullary ray	Permitted